




*All the specifications and contents in this manual are subject to change without notice.
*All the specifications and contents are only for reference, please make the object as the standard.



www.acetech.com
Made In Taiwan


Safety and Precautions

- Do not disassembly the product, unauthorized disassembly voids the warranty
- Do not look into the gun barrel to avoid accidental discharge of BB gun which can lead to any bodily harm or disability.
- Charge the battery at least every 2 months when the tracer is not used to avoid completely discharging the battery. Defect of completely discharging the battery is not covered by warranty.
- Drumfire tracer is NOT water resistant, please DO NOT use gel BBs.
- Drumfire tracer is a 3D printed product, high temperature environments may cause the shell to deform, please avoid high temperature environment exceeding Celsius 60 degree, such as under windshield of a car.


Features

- Drumfire tracer is tracer specially designed for Drumfire , and only fits Drumfire.
- Drumfire tracer supports green and red tracer BBs, and muzzle flash simulation, the effect of flame depends on volume of gas around the muzzle, with more volume, effect will be better.
- Three modes available: Tracer with flame, Flame only, Tracer only.
- Intelligent power control: Drumfire tracer powers on by shaking, enter sleep mode while idle for over 5 minutes.


Contents

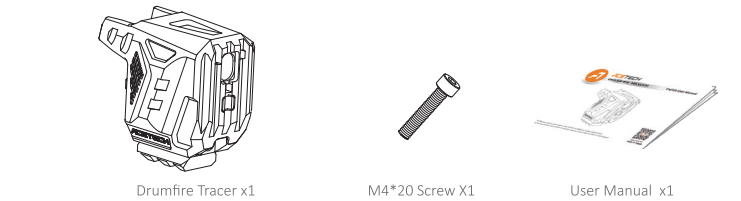

Feature Locations

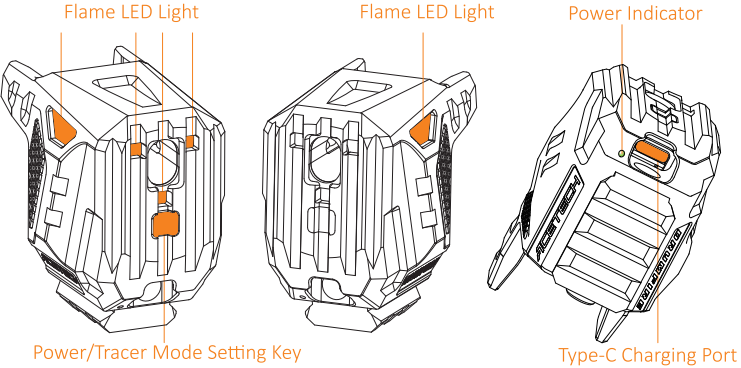

Installation Precautions

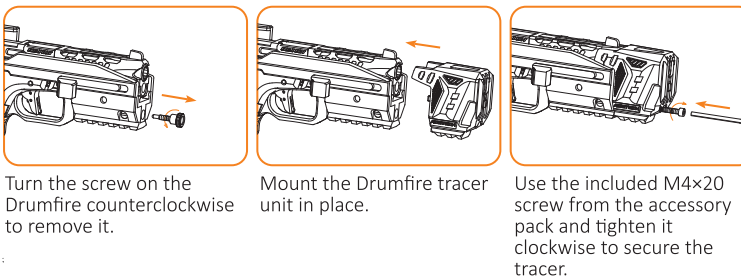


Instructions

Power On & Off

- Power On: Press the power button to turn on the device. A single long beep (1 second) will sound. If the Drumfire Tracer enters sleep mode, simply shake it to wake it automatically.
- Power Off: Press the power button again. The unit will emit a long beep followed by a short beep and then shut down. Shaking will not turn it back on while powered off.
- Mode Switching: While powered on, press and hold the mode button. When a beep is heard, the mode has been switched. Refer to the indicator guide for more details.

Indicator	Illustration	Functions (Default settings: Standard Tracer Mode) Automatically recall last settings
Flash green and beep for once	(●●)x1	Tracer with flame mode
Flash green and beep for two times	(●●)x2	Flame mode(W/o Tracer function)
Flash green and beep for three times	(●●)x3	Tracer mode(W/o Flame function)

- Sleep Mode: Drumfire tracer enters sleep mode automatically when idle for over 5 minutes, and return to standby mode when there is vibration.

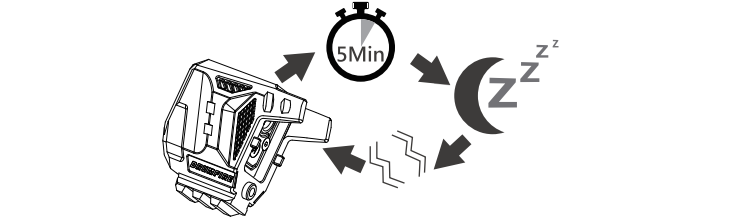

- Low Battery Force Power off: the indicator LED flashes red, 3 flashes from the flame LED to indicate the battery level is too low and shutdown.

Charging the Battery

- Use USB Type C cable to charge Drumfire tracer. Please do full charge at the first time.
- Indicator breaths during charging, and goes off when charging is completed. Breathing light reflects progress of charging:
 - Red: 0% ~ 30%
 - Orange: 30% ~ 60%
 - Green: 80% ~ 99%

- Charge at least once every two months to maintain battery life.
- Prolonged lack of charging may result in over-discharge, making the battery unchargeable.

Self-Test Mode

- Step 1: At off status, press Tracer Set. Key for 6 seconds, then release.
- Step 2: When Drumfire tracer enters self-test mode, the Blue LED and Flame LED will take turn flashing.
- Step 3: Results are indicated by Tracer Indicator Light. Complete: Indicator turns green. Incomplete: Indicator turns red.




Specification

- Supports green and red tracer BBs.
- Battery: Li-Ion with USB Type C port.
- LED power and battery indicator.
- Certificates: FCC CE ROHS.
- Dimension: L 66.3mm x W 42.3mm x H 62.3mm
- Weight: 57.3g

Warranty

- Warranty does not include defect of completely discharging the battery
- Warranty does not include damage from incorrect usage, external force.
- Warranty does not include damage from liquid intruding inside the product
- Drumfire tracer is made from 3D printing, warranty does not include shell deformation caused by high temperature.
- Please register your product purchasing date at Acetech website.



*本說明書所記載之所有內容與功能規格廠商有權更動且不行通知。
*本說明書所記載之所有內容與功能規格將以實物為準。



www.acetech.com
台灣製造

注意事項

- 請勿拆卸產品，未經授權的拆卸將導致保固失效。
- 當安裝於BB槍上，眼睛絕對不可直視槍口，以避免誤操作擊發射擊到眼睛造成眼睛暫時或永久的傷害。
- 長時間不使用時必須先充電再儲放，且每2個月必須充電一次，超過2個月沒有進行充電可能造成電池過度放電而減損壽命甚至導致損壞，過度放電而導致電池損壞不在保固範圍內。
- 不具備防水功能，請勿安裝於水彈槍使用。
- Drumfire Tracer的外殼為3D列印產品，不可放置於溫度60°C以上的環境，譬如汽車前擋玻璃下，於高溫環境下會造成外殼變形。


產品特色

- 此產品為Drumfire專用發光器，必須安裝於Drumfire內部使用。
- Drumfire發光器支援綠色與紅色夜光彈與模擬火焰功能，火焰效果取決於瓦斯槍噴出的煙霧濃度，煙霧越濃，模擬火焰效果越真實。
- 三種模式設定：夜光+火焰模式、火焰模式、夜光模式。
- 智能省電說明智慧省電功能：當靜止持續5分鐘時，Drumfire發光器即自動休眠，當偵震動時則恢復一般模式。


本體及配件



產品圖示說明

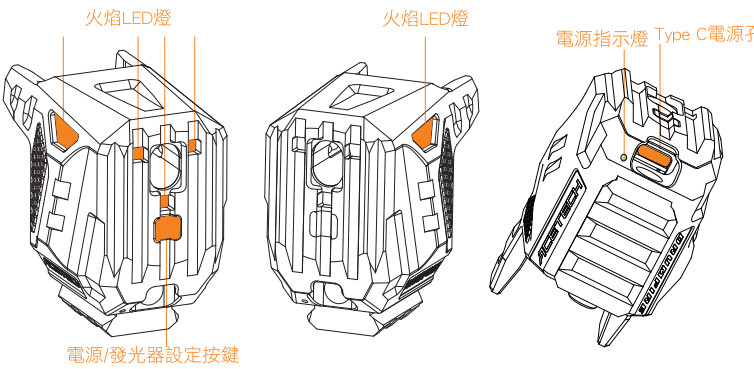

安裝注意說明

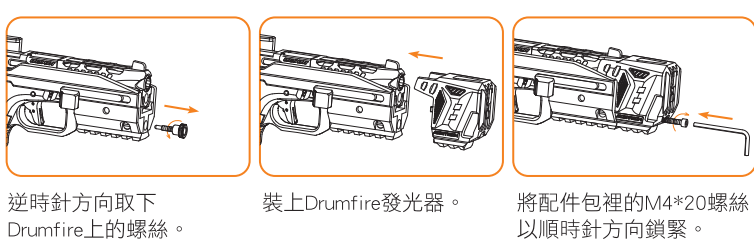


發光器使用與操作說明

開機與關機

- 開機說明：按下電源按鍵開機，蜂鳴器會發出嗶(1秒)聲響，當Drumfire發光器進入自動休眠時只要搖晃Drumfire發光器就會自動開機。
- 關機說明：按下電源按鍵後Drumfire發光器會發出嗶(長聲)…嗶(短聲)的聲音並關機，關機後用搖晃方式將無法開機。
- 模式切換：在開機狀態下，長按發光器設定按鍵，當發出嗶響聲即完成模式切換，請參考下表：


發光器指示燈	圖示	功能說明 (出廠預設：一般模式)有記憶功能
綠色閃1下發出嗶…(1聲)	(●●)x1	發光器與火焰功能
綠色閃2下發出嗶…(2聲)	(●●)x2	火焰功能(關閉發光器功能)
綠色閃3下後發出嗶…(3聲)	(●●)x3	夜光功能(關閉火焰功能)

- 智能省電：在開機狀態下，靜止超過5分鐘後Drumfire發光器會進入省電休眠省電模式，只要震動即恢復正常待機模式。

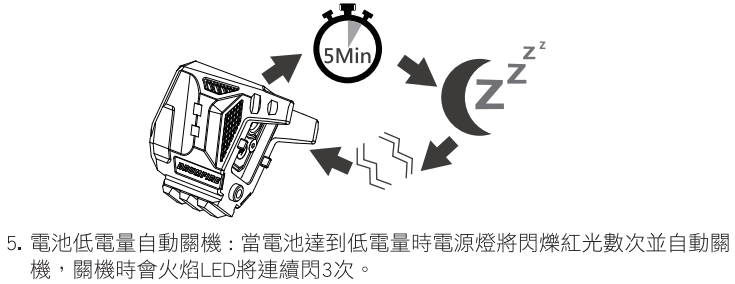


充電

- 使用Type C充電線插入Drumfire發光器進行充電，第一次充電請務必充滿電。

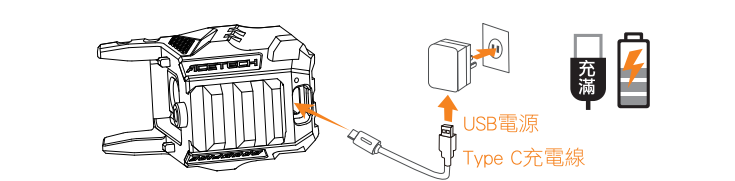

- 充電時，LED指示燈以漸明漸暗的方式表示充電中，當完成充電時充電指示燈將熄滅表示充電完成。充電時之燈號說明如下：

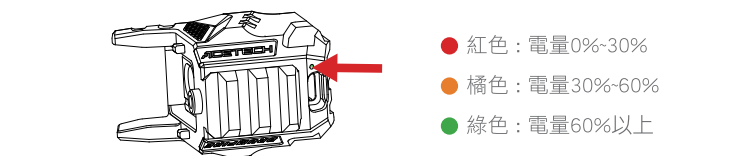

- 至少每2個月充電一次以確保鋰電池之正常壽命。
- 長時間不充電可能導致電池過度放電而無法充電。

自我檢測

- 步驟1: 在充滿電，開機狀態下長按6秒發光器設定按鍵後放開按鍵。
- 步驟2: 發光器將啟動自我測試模式，測試過程中可以看到藍光LED與火焰LED將輪流閃爍。
- 步驟3: 測試完成後發光器指示燈顯示綠色則為正常，顯示紅燈則為異常。



規格

- 支援一般BB彈，紅色與綠色夜光彈。
- Type C充電孔，內建鋰電池。
- LED電源與電量顯示。
- 安規認證：FCC、CE、ROHS。
- 尺寸：長66.3mm x 寬42.3mm x 高62.3mm。
- 重量：57.3g。

保固說明

- 過度放電而導致電池損壞不在保固範圍內。
- 因外力造成的任何損壞均不屬於保固範圍。
- 任何不正確的使用而浸水導致損壞均不屬於保固範圍。
- 本產品外殼為3D列印，高溫環境所導致的變形不屬於保固範圍。
- 請至ACETECH官網，登錄購買日期。






ACETECH

DRUMFIRE トレーサー

取扱説明書



*このマニュアルのすべての仕様及び内容は予告なく変更されることがあります。
*本取扱説明書に記載されている機能数値は全て参考値です。


注意事項

1. 製品を分解しないでください。無断で分解すると保証が無効になります。
2. 誤操作による発射で一時的または永久的な目の損傷を避けるため、銃口を直視しないでください。
3. 長期間使用しない場合、電池の過放電により損傷する可能性があります。過放電による電池の損傷は保証の対象外です。製品を使用しない場合は、少なくとも2ヶ月に一度は満充電してください。
4. 防水機能がないため、ジェルBB弾には使用しないでください。
5. Drumfire トレーサーは3Dプリント製品で、高温環境 (60°C以上) では外殻が変形する可能性があります。例えば、車のフロントガラスの下などに置かないでください。

本製品の特徴について

1. 本製品はDrumfire専用のトレーサーですので、Drumfireに取り付けることが必要です。
2. Drumfire トレーサーは赤色と緑色蓄光BB弾に対応しています。また、銃火 (マズルフラッシュ) 機能があります。銃火の効果は、ガスガンから噴出する煙の濃度によって変わり、煙が濃いほど効果がリアルになります。
3. 三つのモード設定: 銃火トレーサーモード、銃火モード、トレーサーモード。
4. スマート節電: Drumfire トレーサーは5分以上静止していると自動的にスリープ状態になります。振動を検出するとONになり、待機状態に戻ります。

内容物



Drumfire トレーサー x1



M4*20ネジ x1



説明書 x1

製品図示説明

LEDライト


LEDライト

状態表示インジケータ


電源/設定ボタン

Type C充電ポート


取付説明



Drumfireのネジを反時計回りに取り外します。



Drumfireトレーサーを取り付けます。



付属のM4*20ネジを時計回りにしっかり締め付けます。


トレーサーの操作説明

起動と停止

1. 起動説明: 電源/設定ボタンを短押して起動します。「ピッ」(1秒)と鳴り、電源がオンになります。スリープ状態に入った場合は、振るだけで自動的に待機状態に戻ります。
2. 停止説明: 電源/設定ボタンを短押して停止します。三回「ピッ」と鳴り、電源がオフになります。停止状態に入った場合は、振っても待機状態に戻りません。
3. モード切替: 起動状態で電源/設定ボタンを長押しします。「ピッ」と鳴れば、モード切替が完了です。詳しくは下記の表をご参照ください。:

状態表示インジケータ	図 示	説 明 (デフォルトモード: 銃火トレーサーモード) 自動記憶機能付き
緑ランプが1回点滅し、「ピッ」と1回音が鳴る	(●●)x1	銃火トレーサーモード
緑ランプが2回点滅し、「ピッ」と2回音が鳴る	(●●)x2	銃火モード
緑ランプが3回点滅し、「ピッ」と3回音が鳴る	(●●)x3	トレーサーモード



4. 自動スリープ: 5分以上静止すると、スリープ状態に入ります。振動を検出すると、待機状態に戻ります。

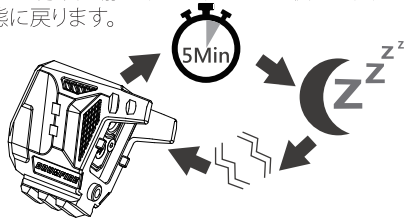


5. 電池の低電力による自動電源オフ: 電池の残量が少なくなった時、状態表示インジケータが赤く数回点滅し、LEDライトが3回点滅した後、自動的に電源がオフになります。

充電

1. Type-C充電ケーブルを使用してDrumfire トレーサーを充電します。初回の充電は必ず満充電にしてください。



2. 充電中は状態表示インジケータがゆっくり点滅して充電中であることを示します。充電が完了すると、状態表示インジケータが消灯して充電完了を示します。充電中の表示は下記の通り:



- 赤: 容量0%~30%
- 橙: 容量30%~60%
- 緑: 容量60%以上

3. 製品を使用しない場合は、少なくとも2ヶ月に一度は満充電してください。
4. 長期間使用しない場合、電池の過放電により損傷する可能性があります。

自己診断機能

ステップ1: 満充電して停止状態にした後、電源/設定ボタンを6秒間押してから離します。

ステップ2: 自己診断モードに入ると、青色LEDとフレイムLEDが交互に点滅します。

ステップ3: 終了後、状態表示インジケータが緑色に点灯すれば正常、赤色の場合は異常となります。



仕様

- ※ 赤色と緑色蓄光BB弾に対応
- ※ Type C充電ポート付き、内蔵リチウム電池。
- ※ LED電源/電量インジケータ。
- ※ 認証: FCC、CE、RoHS。
- ※ 長さ66.3mm x 幅42.3mm x 高さ62.3mm。
- ※ 重量: 57.3g

保証について

1. 電池の過放電による故障、損傷は保証対象外となります。
2. 誤った使用をした場合、また、何らかの力が加わったことが原因による破損、損傷は保証対象外となります。
3. 水没、浸水による破損、損傷は保証対象外となります。
4. Drumfire トレーサーの外殻は3Dプリント製であり、高温環境による変形は保証対象外となります。
5. 保証を利用するために、ACETECHの公式サイトで購入日を登録してください。



ACETECH
www.acetk.com